


1KG=2.205LB 1INCH=25.40MM





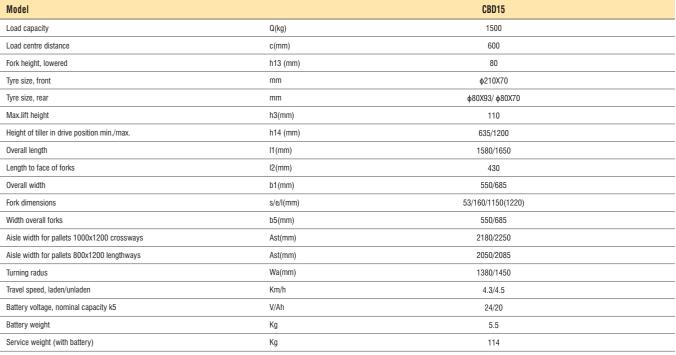

^{*} Option battery: 24V/30Ah









Entry roller

Option: wheel protection plate





Charging Time

Conforms to ISO3691-1



Working Time





Standard: • Lithium battery capacity: 24V/20AH. • Ruyi handle with bully switch.

- High quality emergency switch (as key switch).
- Split rocker arm It makes the equable stress in order to keep the long-time using.
- Driving wheel with horizontal mounted motor, convenience to maintain.
- External battery charger connector, can be charged separately even the battery were used out.
- Single fork roller.

Option:

- Entry roller
- Double fork roller

EN1175-1 EN12053 • Big battery capacity: 24V/30AH (LITHIUM)

12 13