

Model: CBD20L

CBD20L Electric Pallet Trucks are equipped with fixed platform and closed protection arm, with heavy duty design for the space constraints, with middle or high driving speed for long distance transportation.

AC **EPS**



CE Conforms to
EN ISO3691-1 EN 1175-1
EN 16307-1 EN 12100-1
EN 12053-2001 EN 13059-2002

Advantages:

- With Ergonomic designed backrest and handrail. The symmetry backrest is suitable for different operator's habit choice.
- Side stand operation with comfortable backrest, with capacious operation compartment, comfortable and safety for operation.
- The platform is vibration type which is comfortable for the operators.
- Equipped with safety power switch at platform, the truck will be locked when there is no operator. It improves the safety for the truck.
- With strong power system, the max. gradeability can achieve 8% with laden and 17% with unladen.




1KG=2.205LB 1INCH=25.40MM

Model	CBD20L	
Load capacity	Q(kg)	2000
Load center	c(mm)	600
Load distance, centre of drive axle to fork	x(mm)	815/865/935
Fork height, lowered	h13(mm)	82
Tyre size, front	mm	φ 250x80
Tyre size, rear	mm	φ 82x126(98)
Additional wheels (dimensions)	mm	φ 127x57
Wheels, number front rear(x=driven wheels)		1X+2/2(4)
Max. Lift height	h3(mm)	202
Overall length	l1(mm)	2220/2270/2340
Length to face of forks	l2(mm)	1120
Overall width	b1(mm)	773
Fork dimensions	S/e/l(mm)	54×180×1100/1150/1220
Width overall forks	b5(mm)	520/550/650/685
Aisle width for pallets 1000x1200 crossways	Ast(mm)	2970/3020/3090
Aisle width for pallets 800x1200 lengthways	Ast(mm)	2900/2930/2965
Turning radius	Wa(mm)	1970/2020/2090
Travel speed, laden/unladen	Km/h	7/7.1(8.5/9)
Battery voltage, nominal capacity K5	V/Ah	24/240(280)
Battery weight	Kg	225(250)
Battery dimensions l/w/h	mm	650×249×504(535)
Service weight(with battery)	Kg	820

Option: Battery 320Ah

* Option: CBD20L Lithium battery 125AH (Charger 24V/50A)

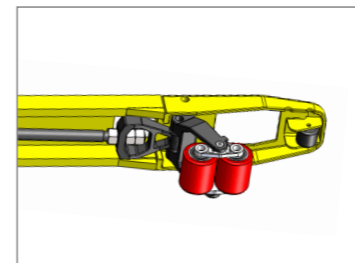

1. The straight tappet length can be precise adjustment.
2. Fork head fitted with double steel entry rollers, for Smoothly enter pallets.



German Frei handle with both side button located in the front of driver for comfortable operation.



Option : keypad access

